


VOR-Flex

塑筋加强型软管

Hoses – with plastic reinforcement

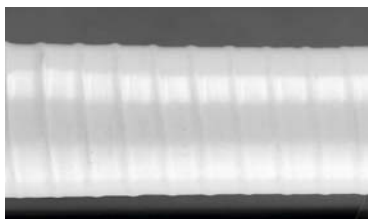

结构: 双层管壁, 轻且弯曲非常灵活的 PVC 软管, 内外壁平滑, 两个 PP 螺旋加强且轴向有纱线进行加强。

应用范围: 牙科器具和医疗器具的专用管, 也可用作线缆保护管。

温度范围:
0°C 至 +40°C (短时间内可达+60°C)

颜色: 黑色, 灰色和白色

Structure: double walled, light and highly flexible PVC hose, inside and outside almost smooth, with a double PP helix and yarn reinforcement along the axis

Applications: special hose for dental devices and medical appliances, cable protection

Temperature range:
0°C to +40°C (short term up to +60°C)

Colour: black, grey and white



内径 $\varnothing = d$		外径 $\varnothing = D$		弯曲半径 (最小值)	重量	= 负荷能力	生产长度	产品代码		
I.D. $\varnothing = d$		O.D. = D		r (min.)	Weight	= Load capacity	Length	Part-No.		
毫米	公差	毫米	公差	毫米	克/米	负压	米			
	Tolerance		Tolerance			Vacuum				
						毫巴				
6	+/- 0,25	10	+/- 0,5	10	40	250	50m	2-99xx-006-00		
8		12		15	50	250		2-99xx-008-00		
10		14		18	60	250		2-99xx-010-00		
10,5		14,5		18	62	200		2-99xx-010-01		
11		15		19	70	200		2-99xx-011-00		
12		16		20	73	200		2-99xx-012-00		
12,5		16,5		20	75	200		2-99xx-012-01		
14		18		24	80	200		2-99xx-014-00		
15		19		25	90	200		2-99xx-015-00		
16		20		27	98	200		2-99xx-016-00		
17,5		21,5		30	108	200	2-99xx-017-01			
19		23		32	113	200	2-99xx-019-00			
20		24,5		33	117	200	2-99xx-020-00			
20,5		25		33	119	200	2-99xx-020-01			
21		25,5		34	121	200	2-99xx-021-00			
21,5		26		34	123	200	2-99xx-021-01			
22		27		35	125	200	2-99xx-022-00			
25		30		40	150	200	2-99xx-025-00			
									25m	
										2-99xx-019-00
										2-99xx-020-00
										2-99xx-020-01
										2-99xx-021-00

如需其他内径和管壁颜色, 欢迎来电垂询

Other diameters and colours on request

表中负压和压力值会随安装和工作条件而改变。如有疑问, 请将应用告知我们, 我们非常高兴提供建议给您。如需其他规格软管 (如: 其他的内径、管壁颜色和公差), 欢迎来电垂询。

注: 以上数据基于常温 20°C.

Stand: 01/2009

Depending on installation or operating conditions, the vacuum or pressure values may differ from those stated in the table. In doubtful cases, provide a description of the application you have in mind, and we will be pleased to advise you. Alternative sizes and colours, different tolerances etc. can be supplied on request. Technical Data (at 20°C).

VACUFLEX GmbH, Hessenring 8-12, D-64546 Mörfelden, Germany
Tel. +49(0)6105-9339-0 Fax: +49(0)6105-9339-60

e-mail: info@vacuflex.de
Internet: www.vacuflex.de



A SCHAUBURG HOSE TECHNOLOGY COMPANY